

## CONTENTS

|   |     |
|---|-----|
| Bathroom accessories . . . . .          | 203 |
| Bathroom modules . . . . .              | 204 |
| Filtration . . . . .                    | 193 |
| Gas compliance and safety . . . . .     | 205 |
| Gas copper pipe and fasteners . . . . . | 206 |
| Gas cylinders and accessories . . . . . | 210 |
| Gas fittings and adaptors . . . . .     | 207 |
| Gas hoses . . . . .                     | 212 |
| Gas regulators . . . . .                | 211 |
| Hoses and fillers . . . . .             | 172 |
| Hot water systems . . . . .             | 192 |
| Plumbing fittings . . . . .             | 186 |
| Pumps . . . . .                         | 179 |
| Sinks and basins . . . . .              | 194 |
| Tanks and accessories . . . . .         | 175 |
| Tapware . . . . .                       | 198 |



# PLUMBING



## CAMEC LOCKABLE WATER FILLER

Lockable water filler supplied with 2 keys.

### FEATURES:

- One piece filler neck
- Lockable water filler supplied with two keys
- Camec One Key Fits All barrel housing
- Available in both left and right hand hinged flap
- Flap opens 180° to be flush with the RV wall
- Emergency opening feature from the inside

### SPECIFICATIONS:

- 10mm barb on breather
- 25mm barb on filler neck

WHITE RIGHT HAND HINGE

BLACK RIGHT HAND HINGE

WHITE LEFT HAND HINGE

BLACK LEFT HAND HINGE

039945

039946

040269

040270



### CAP AND KEY - LOCKABLE WATER FILLER

Available in black and white.

WHITE  
BLACK

006160  
006161



### WATER FILLER COMPLETE - AC41

Plastic water filler with hinged flap.

FLAP ONLY

006173  
006174



### FIAMMA LOCKABLE WATER FILLER

Locking water cap.

BLACK  
WHITE

006169  
006170



### RECESS WATER FILLER AND CAP

To suit Camec water tanks.  
• White

006176



### CAP ONLY TO SUIT FIAMMA WATER FILLER

With key.  
WHITE  
BLACK

043326  
043327





## CAMEC CURLY COIL HOSE

Camec has tamed the drinking water hose. Coil design - able to be gathered and stored easily.

### FEATURES:

- Drinking water approved
- Conforms to AS/NZS4020
- Only contains high quality food grade compounds compliant to FDA 21
- CFR 177.1520C
- Durable, flexible and reinforced for standard tap pressures
- Non-toxic, safe and clean
- Complete with standard brass garden tap fittings

### SPECIFICATIONS:

- 10 usable metres

043223



## SHURFLO CITY WATER ENTRY PRESSURE REGULATOR - WALL MOUNTED

Combined mains pressure water entry, pressure regulator and check valve. Reduces mains pressure to 50psi.

### FEATURES:

- Leak tight, stress and crack resistant
- Quick, easy wall mount

### SPECIFICATIONS:

- Water pressure is limited to 50psi

#### WHITE

WHITE RETAIL PACK

#### CHROME

CHROME RETAIL PACK

#### BLACK

BLACK RETAIL PACK

006154

006155

006156

006158

043432

043433



## FLUTED WASTE HOSE/SULLAGE HOSE

This hose uses nitrile to minimise the permeation of odours through the hose when used with sanitation systems in boats, caravans and recreational vehicles.

### FEATURES:

- Excellent UV resistance to withstand extreme Australian conditions
- Ribbed outer cover provides superior resistance to abrasion
- Recommended for all air and water applications where a long lasting hose is required
- Black

25MM X 10M SMOOTH BORE RIGID

038435

28MM X 10M SMOOTH BORE

043365

25MM X 20M SMOOTH BORE

005284

32MM X 20M SMOOTH BORE

034717

25MM X 30M NON SMOOTH BORE

005280



## CAMEC DRINKING WATER HOSE

Non toxic, no taste. Hose will not taint the water.

### SPECIFICATIONS

- Plastic fittings attached for easy connection to a garden tap

12MM ID X 10M

005303

12MM ID X 20M

005301

12MM ID X 100M

005304

## BLACK VINYL HOSE FOODGRADE

Ideal for RV plumbing and many other applications.

### FEATURES:

- Complies with Australian standards
- Use where plumbing may be exposed to light to reduce algae growth

### SPECIFICATIONS:

- Internal diameters of 12.5 and 25mm

- Will withstand temperatures from -10°C up to 60°C

- Smooth bore and outer surface

12.5MM X 30M X 2MM WALL

005267

25MM X 30M X 3.5 WALL

005269



**CAMEC** GO FURTHER



## CLEAR VINYL FOODGRADE HOSE

Ideal for RV plumbing and many other applications. Clear hose is best used in areas not exposed to light.

10MM X 50M X 1.6MM WALL

035559

12MM X 30M X 2MM WALL

005272

16MM X 30M

005275

25MM X 30M X 3.5MM WALL

005274



### FLOOR SEAL WHITE

#### SPECIFICATIONS:

- White
- To suit hose 10-19mm outer diameter
- Pack of 100

040868



### HOSE FLAT DRINKING WATER

Ideal for connection to caravans and motorhomes using snap-on high quality brass fittings.

#### FEATURES:

- High flow
- Food grade liner
- Solid brass fittings
- Tangle free storage
- Complete with compact reel

#### SPECIFICATIONS:

- Internal diameter of 19mm, which provides a high flow

FLAT DRINKING WATER HOSE 10 METRE 005309  
 FLAT DRINKING WATER HOSE 15 METRE 005310  
 REPLACEMENT COMPACT REEL 005313



### HOSE FLAT SULLAGE


For general use on caravans, motorhomes and boats.

#### FEATURES:

- For greater grey water disposal - typically a caravan or motorhome with a shower
- Smooth surface for easy cleaning
- No seeping
- Save on space
- Complete with multi reel

FLAT SULLAGE HOSE 6M 25MM ID 038685  
 FLAT SULLAGE HOSE 9M 25MM ID 005315  
 FLAT SULLAGE HOSE 9M 32MM ID 005316

## TYPICAL PLUMBING INSTALLATION

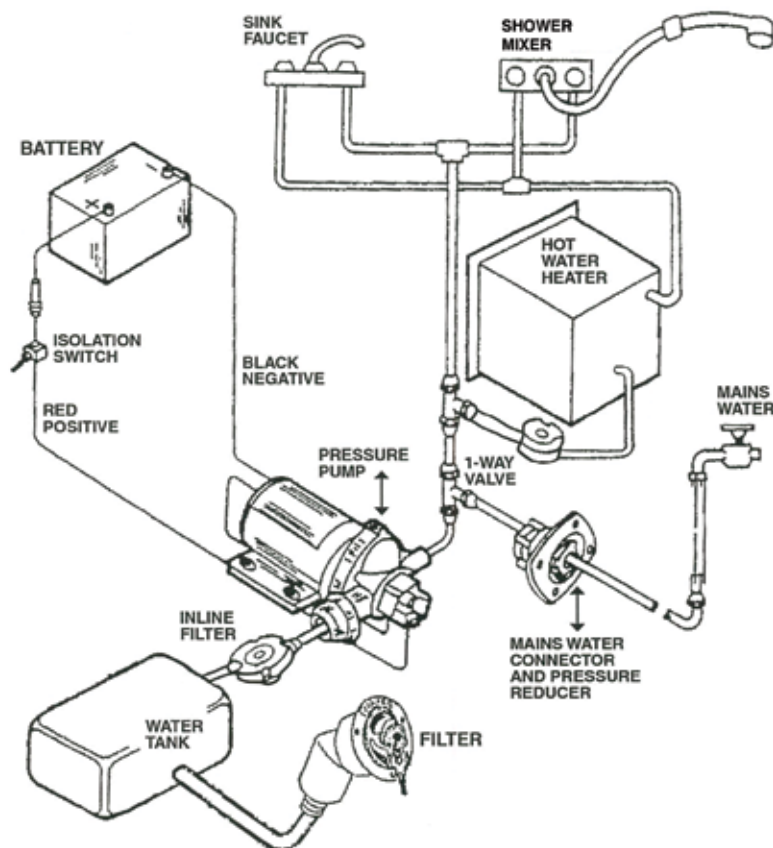

### STOW-A-WAY HOSE CARRIER AND HANDLE

Keeps your hose or power cable neat and tangle free. The built-in "hang up hole" can be used when storing.

#### FEATURES:

- Heavy duty and adjustable to hold a variety of hose lengths

#### SPECIFICATIONS:

- Dimensions: 600mm(l) x 104mm(w)

005314





### CAMEC WATER TANK

Plastic fresh water tank, tough, non-toxic. Used by Australian caravan manufacturers.

#### FEATURES:

- High density polyethylene
- Foodgrade

82 LITRE 1220 X 490 X 190

033423

#### SPECIFICATIONS:

- Tank comes with two 1/2" BSP plugs
- Outlets are 2 x 1/2" female BSP
- Inlet 25mm barb

59 LITRE 865 X 490 X 490

033422



### WATER TANK PROTECTOR

FOR 59 LITRE 900 X 850  
FOR 82 LITRE 1250 X 850

034578  
034579



### CAMEC MK2 55 LITRE WATER TANK

Australian made water tank complete with approved vent, incorporating inlet and drain plug. Tapered body for greater water exit. No more hose removal to empty tank. Made from food grade material. Ultra violet stabilised for long life. Inlet and outlet sealed for customer protection.

#### SPECIFICATIONS:

- Dimensions: 470mm(l) x 960mm(h) x 220mm(d)
- Other Dimensions: 175mm (rear depth) 185mm (front depth)
- Capacity: 55 litre

006086



### WATER TANK BRACKETS

FOR 59 LITRE  
FOR 82 LITRE  
FOR 61 LITRE  
FOR 70 LITRE  
FOR 77 LITRE  
FOR 83 LITRE  
FOR 106 LITRE

034580  
034581  
035609  
035610  
035611  
035612  
035613



### MODULAR 43 LITRE WATER TANK

The modular caravan and RV tank is blow moulded from food contact approved, high molecular weight, high density polyethylene. This makes the tank a super tough performer. Moulded with two integral 20mm (3/4 MBSP) threads that can accept a wide variety of standard fixtures and fittings. Using these standard fittings, the tanks can be networked together to provide almost limitless water storage options for your vehicle.

#### SPECIFICATIONS:

- 3/4 (20mm) MBSP

43 LITRE WATER TANK

A LINK TANK

B LINK TANK

CAP

ELBOW

REDUCING SOCKET 25-20MM FBSP

ADAPTOR 20MM FBSP TO 15 MBSP

TEE FITTING 20MM FBSP

043394  
043708  
043709  
043410  
043411  
043412  
043414  
043426

**ROTO WATER TANK**

Plastic, tough, non toxic standard fresh water tank for caravans and recreational vehicles.

**FEATURES:**

- Australian made from food contact approved resin

|                     |               |
|---------------------|---------------|
| <b>84L</b>          | <b>006100</b> |
| <b>F LINK - 77L</b> | <b>006101</b> |
| <b>R LINK - 77L</b> | <b>006102</b> |

**ROTO WATER TANK**

Plastic, tough, non toxic standard fresh water tank for caravans and recreational vehicles.

**FEATURES:**

- Australian made from food contact approved resin

|                     |               |
|---------------------|---------------|
| <b>83L</b>          | <b>006104</b> |
| <b>F LINK - 83L</b> | <b>006105</b> |
| <b>R LINK - 83L</b> | <b>006106</b> |

**ROTO WATER TANK**

Plastic, tough, non toxic fresh water tank for caravans and recreational vehicles.

**FEATURES:**

- Australian made from food contact approved resin

|                      |               |
|----------------------|---------------|
| <b>106L</b>          | <b>006107</b> |
| <b>F LINK - 106L</b> | <b>006108</b> |
| <b>R LINK - 106L</b> | <b>006109</b> |

**ROTO CAMPER 55 LITRE WATER TANK (NO BARBS)**

Plastic fresh water tank for caravans and recreational vehicles.

**FEATURES:**

- Australian made from food contact approved resin

**SPECIFICATIONS:**

- Dimensions: 760mm(l) x 350mm(h) x 230mm(d)
- Capacity: 55 litre (12 gallons)
- Can be installed vertically or horizontally
- No barbs

**006096****ROTO 61 LITRE ROUND CORNER WATER TANK**

Plastic, tough, non toxic, fresh water round corner tank for caravans and recreational vehicles.

**FEATURES:**

- Australian made from food contact approved resin

**SPECIFICATIONS:**

- Dimensions: 895mm(l) x 480mm(w) x 165mm(d)
- Capacity: 61 litre (13 gallons)
- Outlet: 1/2" barb
- Inlet: 1" barb
- Drilled breather hole

**006097****ROTO 70 LITRE WATER TANK (NO BARBS)**

Plastic fresh water tank for caravans and recreational vehicles.

**FEATURES:**

- Australian made from food contact approved polyethylene

**SPECIFICATIONS:**

- Dimensions: 850mm(l) x 510mm(h) x 160mm(d)
- Capacity: 70 litre (15 gallons)
- No barbs
- Inlet 3/4" F thread
- Outlet 3/8" F thread
- Small drilled breather hole

**006099****AL-KO 52 LITRE WATER TANK**

Plastic, tough, non toxic fresh water tank for caravans and recreational vehicles.

**FEATURES:**

- Has two small drilled breather holes (no thread) on the upper corner of the tank
- The top also has two tapered red plastic push in bungs that cover holes left from the manufacturing process

**SPECIFICATIONS:**

- Dimensions: 1010mm(l) x 175mm(h) x 330mm(w)
- Capacity: 52 litres (11.5 gallons)

**006089****FIAMMA 70 LITRE WATER TANK**

Fiamma fresh water tank is made of non-toxic material and can be installed either horizontally or vertically.

**FEATURES:**

- Very flexible and good quality water tank for use in campervan or motorhome
- Has clamps to install against wall (vertical) or on floor (horizontal) and the water outlet can be fitted in any one of six positions
- Complete with all installation fittings

**SPECIFICATIONS:**

- Dimensions: 700mm(l) x 240mm(h) x 470mm(d)

**006110**



## CAMEC TANK BARB OUTLET DRILLED

To suit CAMEC water tanks.

**SPECIFICATIONS:**

1/2" BSP x 3/8" BSP

006079



## CAMEC TANK BARB PLUG UNDRILLED

To suit CAMEC water tanks.

006080



## TANK CLEEN 200G

Cleans and deodorises freshwater tanks.

**FEATURES:**

- An effective remedy for water tainting problems
- Treats up to 182 litres

**SPECIFICATIONS:**

- 200gm

000261



## PLUG 1/2" BSP

To suit CAMEC Water Tanks.

042652



## PLASTIC BUSH 1/2" BSP x 3/8" BSPF

To suit CAMEC water tanks (refer codes 033422 and 033423.)

033881



## BREATHER 10MM BARB x 3/4" MALE BSP

006083



## TEE FOR CAMEC MK2 WATER TANK

006088



## DRAIN CAP FOR CAMEC MK2 WATER TANK

006087



## TAP INLINE 13MM x 13MM

1/2" low density poly quick action valve - barbed at both ends.

005401



### WATER TANK SENDER PROBE

Water tank sender probe for use with RV Traveler LED Tank Gauge for "under chassis low profile tanks".

#### FEATURES:

- With one push on the test button you can check the water level of up to three tanks

2.5M  
5.0M  
7.5M

040282  
040283  
040284



### SQUARE WATER TANK GAUGE

Accurately displays the water level in tanks.

#### FEATURES:

- The ability to customise the kits to suit your requirements with a range of single, double and triple tank gauges
- With one push on the test button you can check the water level of up to three tanks
- Easy installation - complete with hardware including battery
- Does not include sender probe

SINGLE WHITE GAUGE  
DOUBLE WHITE GAUGE  
TRIPLE WHITE GAUGE  
SINGLE BLACK GAUGE  
DOUBLE BLACK GAUGE  
TRIPLE BLACK GAUGE

040276  
040278  
040280  
040277  
040279  
040281



### LCD WATER TANK AND BATTERY GAUGES

These gauges have a coloured LCD analogue display with LED backlighting for crystal clear viewing. Only 50mA draw so they can be left on without flattening your on-board battery. There is a power on/off switch to turn the gauge off when the caravan is not in use.

#### FEATURES:

- Monitors one water tank, either metal or plastic
- Five levels are indicated on display
- Constant display of levels without needing to press a button
- On/Off switch when caravan is not being used

#### SPECIFICATIONS:

- Dimensions: 108mm x 108mm
- From 10 to 20mm thick
- 12V connection and tank plug entry at rear requires a cutout 50mm wide x 20mm high
- Colour of needle changes to red and flashes at the lowest (RES) level

SINGLE WATER TANK GAUGE 043453  
SINGLE WATER TANK, 1 BATTERY GAUGE 043454  
DOUBLE WATER TANK GAUGE 043455  
DOUBLE WATER TANK, 1 BATTERY GAUGE 043456  
TRIPLE WATER TANK GAUGE 043457



### RV TRAVELLER LED TANK GAUGE

Simple monitoring of fresh or grey water. Incorporates its own battery power supply and no connection to vehicle's power supply is required. One kit per tank required.

#### FEATURES:

- For under chassis low profile tanks, please use either code 040282, 2.5m probe, code 040283, 5m probe, or code 040284, 7.5m probe
- For deep tanks please use code 006116, tank sender probe kit

1 TANK  
2 TANKS  
3 TANKS

006118  
006119  
006120



### RV TRAVELLER LED GAUGE WATER AND WASTE

Simple monitoring of fresh or grey water. Incorporates its own battery power supply and no connection to vehicle's power supply is required. One kit per tank required.

#### FEATURES:

- For water sender probes - under chassis low profile tank, please use code 040282, 2.5m probe, or code 040283, 5m probe or 040284, 7.5m probe
- For deep tanks please use code 006116, tank sender probe kit
- 2 gauges - 1 water / 1 waste

006121



### JRV FRESH WATER TANK MONITOR

These systems allow the tank level monitoring of fresh water, gray water, black water.

JRV FRESH WATER MONITOR BLACK 006139  
JRV FRESH WATER MONITOR WHITE 006141  
JRV WATER TANK MONITOR BLACK 006147  
JRV FRESH/GREY/BLACK WATER MONITOR BLACK 006144



### WATER TANK SENDER PROBE KIT

To suit deeper tanks - 5 probes are mounted into the side of the tank (fresh or grey water only). Supplied with wiring kit, one junction box and 5m lead.

#### FEATURES:

- For under chassis low profile tanks, please use either code 040282, 2.5m probe, code 040283, 5m probe, or code 040284, 7.5m probe

006116



### LEAD 2.5M TO SUIT WATER MONITOR

006133





### FLOJET 12V TRIPLEX PUMP C-TICK QUAD FITTINGS

The Flojet Triplex 12V Pump has 1 l litres per minute water flow, 50 psi, automatic cut-off switch and is C-Tick approved. The pump is supplied with two Flojet quad port fittings that have been developed for the Australian RV market using John Guest and DM 12mm plumbing. The 12mm OD tube connects directly into each quad port fitting, eliminating the need to purchase adaptors. This not only saves cost but allows for quicker installation.

#### FEATURES:

- C-Tick approved
- Supplied with 2 x quad port fittings to suit 12mm OD tube
- Automatic cut off switch
- Note: Filter sold separately to pump - refer code 041775

#### SPECIFICATIONS:

- Dimensions: 200mm(l) x 130mm(h) x 120mm(d)
- Flow Rate: 1 l/min
- Pressure: 50 psi

041723



### FLOJET 12V COMPACT PUMP 3/8B

Compact, automatic shut off, 12V pump.

#### FEATURES:

- Self priming
- Dry running
- Soft, noise absorbing mounts
- Snap-in port fittings
- Smooth operation without accumulator tank

#### SPECIFICATIONS:

- Dimensions: 157mm(l) x 58mm(h) x 89mm(w)
- Weight: 1.6kg
- Flow Rate: 4.3L/min
- Pressure: 50psi
- Voltage: 12V

005700



### FLOJET PUMP AND FILTER

Super quiet, reliable demand pumps. Complete with filter.

#### FEATURES:

- Smooth operation without accumulator tank
- Permanent magnet, ball bearing motor
- Four chamber diaphragm design
- Corrosion resistant materials
- Includes bypass

#### SPECIFICATIONS:

- Dimensions: 99mm(h) x 160mm(l) x 206mm(w)
- Flow Rate: 12.5L/min
- Voltage: 12V
- Pressure Switch: 15psi (1.1 bar) cut in - 35psi (2.5 bar) cut out
- Amp Draw: 3.9A

12V  
24V005702  
043251

### FLOJET 12V RV PUMP

Self priming 12V diaphragm pump with 1/2" fittings.

#### FEATURES:

- Self primes up to 2.4m vertical lift
- Four piston design delivers higher flow rates
- Quick connect plug-in ports for easy installation
- Pressure switch control to run the pump only as needed
- Includes an internal bypass to eliminate

pulsating flow and switch chatter

#### SPECIFICATIONS:

- Dimensions: 157mm(l) x 58mm(l) x 89mm(w)
- Weight: 2.03kg
- Flow Rate: 12.1L/min up to 17L/min
- Pressure Switch: 22psi cut in - 35psi cut out
- Voltage: 12V

005727



### FLOJET 12V WASHER PUMP 4.5GPM

Ideal for cleaning leisure boats, fish boxes, anchor chains and dinghies.

#### FEATURES:

- Self primes up to 2.4m vertical lift
- Includes filter/strainer and nozzle
- Quick connect plug-in ports for easy installation
- Pressure switch control
- Optional pressure nozzle control to run the pump only as needed

#### SPECIFICATIONS:

- Dimensions: 127mm(l) x 102mm(h) x 407mm(d)
- Flow Rate: 12.1L/min up to 17L/min
- Pressure Switch: 20psi cut in - 40psi cut out
- Voltage: 12V

005620



### SHURFLO AQUA KING PUMP

SHURflo Aqua King pump automatically senses when the tap has been switched on. Ideal for RV or marine applications. Reliable and quiet, it can run dry without damage.

#### FEATURES:

- Multi-fixture applications
- Self-priming and sealed switch
- Seamless shell e-coated motor
- Ignition and thermally protected

#### SPECIFICATIONS:

- Dimensions: 180mm(l) x 110mm(h) x 130mm(d)
- Flow Rate: 11.35L/min
- Pressure: 55psi
- Voltage: 12V

12V  
24V043430  
034441

### SHURFLO AQUA KING JUNIOR PUMP

This 2 GPM pump guarantees quiet operation and smooth performance while providing the ultimate in durability and reliability. This 12V DC pump is designed and built for the harsh marine environment and for 1-2 fixture applications.

#### FEATURES:

- Self-priming and sealed switch
- Seamless shell e-coated motor
- Ignition and thermally protected

#### SPECIFICATIONS:

- Dimension: 184mm(l) x 127mm(h) x 118mm(w)
- Flow Rate: 7.6L/min (2.0/gpm)
- Voltage: 12V DC
- Amps: 4A
- Shut-Off Pressure: 30psi

005656



### SHURFLO 4048 12V STANDARD PUMP ONLY

Pump guarantees quiet operation and smooth performance while providing the ultimate in durability and reliability.

#### FEATURES:

- Thermally protected
- Smooth flow

#### SPECIFICATIONS:

- 15L/min
- Voltage: 12V
- Pressure: 55psi

041554



## SHURflo 4009 12V STANDARD PUMP ONLY

SHURflo's 4009 Series fresh water pump was created with a unique one piece diaphragm and internal bypass, assuring long life and top performance in all plumbing systems. The 4009 series pump is constructed for high flow demand, low noise and no rapid cycling. SHURflo's quality reputation has been built on the reliability and dependability of every pump they build. The 4009 series fresh water, automatic demand pump is quiet, thermally protected and can run dry without damage.

### FEATURES:

- Internal bypass will prevent rapid cycling
- C-Tick approved
- 4 chamber diaphragm pump

### SPECIFICATIONS:

- 12VDC permanent magnet
- Intermittent duty
- Shut Off: 45psi
- Dry Prime: 1.82m
- Pressure Switch: 45psi shut off

12V STANDARD  
12V STANDARD RETAIL BOX

040860  
043243



## SHURflo 12V BLASTER PUMP

Perfect for tough wash down applications such as fish box, scaling and anchor chain cleaning.

### FEATURES:

- Supplied with spray nozzle
- Delivers high lift, can run dry without damage and will not overheat with extended use
- Rugged and self-priming

### SPECIFICATIONS:

- Flow Rate: 13.2L/min
- Pressure: 45psi

RETAIL BOX

034384



## SHURflo 12V NAUTILUS PUMP

Tough, rugged and compact. Designed to deliver 3.7L/min with minimal power consumption. Perfect for low volume, single fixture applications. Protected from thermal overload.

### FEATURES:

- Tough, rugged and compact
- Requires in-line switch and 3A fuse
- 3/8" barbs

005588



## SHURflo 24VOLT BLASTER WASH PUMP

Rugged and self-priming. Perfect for tough washdown applications such as fish box, scaling and anchor chain cleaning. Supplied with spray nozzle.

### FEATURES:

- Ignition protected
- Switches are sealed against water damage
- Delivers high lift, can run dry without damage
- Won't overheat with extended use

### SPECIFICATIONS:

- Dimension: 203mm(w) x 136mm(l) x 127mm(h)
- Flow Rate: 13.2 L/min
- Voltage: 24V DC -3A
- Pressure: 45psi

24V PUMP

3.1M HOSE FOR WASH PUMP

005604

005258



## SHURflo 4009 24VOLT STANDARD PUMP ONLY

These portable water pumps are self-priming and employ three independent pumping chambers to pump water smoothly and quietly.

### SPECIFICATIONS:

- Inlet and outlet: 1/2" male BSP threaded
- 30psi shut off

041556



## SHURflo 12V COMPACT PUMP

This compact automatic demand fresh water pump offers durability and dependability making it ideal for low volume, intermittent duty applications. The 105 pump self-primers up to 2.0 vertical metres while delivering over 3.8Lpm. A 12V low power consumption motor, equipped with thermal protection and long life pressure switch rated to 30PSI, provides high pump performance and reliability.

### FEATURES:

- Self primes up to 2.0m vertically while delivering up to 3.8L/min
- Perfect for low volume, intermittent duty applications
- Compact automatic demand pump
- Inlet and outlet: 10mm (3/8") barb

RETAIL BOX

005698  
043241





## WHALE PRESSURE SWITCH

When fitted inline provides a convenient way to create a pressure system with an electric pump without its own switch.

### SPECIFICATIONS:

- Current Rating: 10A 12/24V
- Cut Out Pressure: Within range 5-25psi

005754



## WHALE SUPERSUB 12V PUMP

Suitable for dual purpose manual/electric systems.

### FEATURES:

- Does not require priming
- Simple, compact and low cost
- Self venting design eliminates air locking
- Designed to be dropped into a water tank
- Inexpensive way to update from a manual to an electric system

### SPECIFICATIONS:

- Dimensions: 116mm(l) x 50mm(h) x 50mm(d)
- Weight: 150g
- Output: 12L/min
- Pumps fresh, saltwater and diesel
- Low power consumption

035605



## WHALE 12V IN LINE PUMP

In-line, 12V centrifugal pump, light enough to be suspended in the hose line. Sealed against casual water.

### FEATURES:

- Simple, compact and low cost
- Boosts pressure in manual or electric pump systems
- Ideal for up to two mixer outlets
- Lightweight, fits unsupported into pipework
- Fits neatly below water tank

### SPECIFICATIONS:

- Dimensions: 117mm(l) x 50mm(h) x 37mm(d)
- Weight: 150g
- Output: 10L/min
- Hose tails accept 3/8" or 1/2" ID hose
- Low current draw

005753



## WHALE SUPERSUB 921 12V PUMP

Suitable for dual purpose manual/electric systems.

### FEATURES:

- Self venting design eliminates air locking
- Designed to be dropped into a water tank
- Does not require priming
- Simple, compact and low cost
- Inexpensive way to update from a manual to an electric system

### SPECIFICATIONS:

- Dimensions: 160mm(l) x 50mm(h) x 50mm(d)
- Weight: 200g
- Flow Rate: 15L/min
- Pumps fresh, saltwater and diesel
- Low power consumption

005751



## WHALE 12V PORTABLE PUMP KIT

Handy 12V submersible pump with accessories.

### FEATURES:

- Simply drop the pump into your water supply and then plug it in
- Great for filling your caravan fresh water tank from a jerry can when camping
- Great for washing down bikes, surf boards etc
- Robust pump suitable for cold and warm water; diesel, light oils and water-based fluids including most water based pesticides
- Pumps up to 15 litres per minute
- Maximum continuous usage should not exceed 15 minutes

### KIT INCLUDES:

- Whale supersub pump
- 3.75m clear hose and nozzle
- 3.75m lead for 12V connections to a cigarette lighter
- Battery terminal adaptor

043259



## WHALE ONE-WAY IN-LINE VALVE

When fitted in line on the suction side of a pump, Whale non-return valves will ensure maintenance of prime, particularly if pump valves are weak.

### SPECIFICATIONS:

- Suit 12.5mm ID hose

005785



### FLOJET ELBOW 1/2" BARB

Quick connect quad port fitting incorporating a 90° elbow with 1/2" barb.

005704



### FIAMMA ACCUMULATOR TANK A20

May be used with most pump systems and may be mounted in any position.

#### SPECIFICATIONS:

- Dimensions: 250mm(l) x 120mm(h) x 100mm(d)

035603



### FLOJET FILTER 1/2" BARB FILTER QUAD PORT FITTED TO PUMP

#### SPECIFICATIONS:

- Filter (strainer) inlet, 12mm barb to Quad with elbow
- Plug in quad port 90° strainer allows for easy installation and compatibility

005706



### FLOJET ELBOW 1/2" THREADED

005707



### FLOJET IN-LINE FILTER 1/2" MALE THREAD BOTH ENDS

005724



### FLOJET IN-LINE FILTER 1/2" BARB

005712



### FLOJET IN-LINE FILTER

The Flojet 40 mesh filter has a quick connect quad port fitting to suit Flojet pumps and the filter mesh is easily removed for cleaning.

041775



### FLOJET STRAINER 4405 SERIES

For use with the Flojet Quad II Series Pump.

043252







**FLOJET REPAIR KIT**

005714



**FLOJET DIAPHRAGM KIT**

005715



**FLOJET PRESSURE SWITCH ASSEMBLY - 35PSI**

005716



**FLOJET PRESSURE SWITCH ASSEMBLY - 40PSI**

005719



**ADAPTOR 12MM PUSH FITTING**

Suitable for Flojet pump inlet/outlet.

042543



**FLOJET STRAIGHT UNION 1/2" BARB**

005705



**FLOJET STRAIGHT 1/2" THREADED**

005711



**FLOJET 1/2 FITTING STRAIGHT PAIR OF QUAD FITTINGS**

039903



### SHURflo SWIVEL UNIONS

• Note: these will not give a water tight seal on all BSP threads as they also rely on the internal section making contact with the internal flared SHURflo/Flojet pump thread

|                                  |        |
|----------------------------------|--------|
| 1/2B X 1/2F TIGHTEN BY HAND ONLY | 005407 |
| 1/2B X 1/2F TIGHTEN BY HAND OR   |        |
| SPANNER                          | 005408 |
| 3/4B X 1/2F TIGHTEN BY HAND ONLY | 005410 |



### SHURflo SWIVEL ELBOW

Nut and tail to suit 12mm hose. Tighten by hand only.

• Please note, these will not give a water tight seal on all BSP threads as they also rely on the internal section making contact with the internal flared SHURflo/Flojet pump thread

|                        |        |
|------------------------|--------|
| 1/2" BSP X 1/2" FEMALE | 005404 |
| 1/3" BSP X 1/2" FEMALE | 005406 |



### SHURflo 4009 SPARE PARTS

|                   |        |
|-------------------|--------|
| SWITCH 45PSI      | 042112 |
| UPPER ASSEMBLY 30 | 042113 |
| UPPER ASSEMBLY 45 | 042114 |
| VALVE ASSEMBLY    | 042115 |
| DRIVE ASSEMBLY    | 042116 |
| CHECK VALVE       | 042117 |



### SHURflo CLASSIC TWIST ON FILTER

Fits directly to the inlet of all Classic and Aqua King pumps.

#### FEATURES:

- The transparent design allows for easy visual check while the bowl allows easy cleaning

#### SPECIFICATIONS:

- 1/2" NPSM Inlet

|                         |        |
|-------------------------|--------|
| EXTREME TWIST ON FILTER | 005687 |
| CLASSIC TWIST ON FILTER | 005672 |
| CLASSIC TWIST ON FILTER |        |
| RETAIL PACK             | 034391 |



### SHURflo EXTREME FITTING KIT 1/2" STRAIGHT THREAD

005519



### SHURflo PRESSURE ACCUMULATOR

Pre-pressurised to 25psi, cycling pulsation is reduced and pressure spikes up to 125psi increasing the life of the pump and saving battery power.

#### SPECIFICATIONS:

- 1/2" NPTM
- Pressure: 30psi

034387



### SHURflo 12/24VOLT FLOAT SWITCH STANDARD CAGED

SHURflo Float Switch provides ultimate reliability to boats for water evacuation in conjunction with bilge pumps.

#### FEATURES:

- Remote or direct mounting
- 3" tinned wire assembly
- Non-mercury
- Ignition protected

036789



### SHURflo BILGE PUMP 500

This pump is built for the harsh marine environment to withstand the toughest conditions.

#### FEATURES:

- Submersible with 3" tinned wire assembly
- Anti-airlock
- Ignition protected

#### SPECIFICATIONS:

- ABS housing with nylon impeller

036770



### CAMEC HAND PUMP

Robust chrome plated brass hand pump for drinking water.

#### FEATURES:

- Self priming, dual action
- Easy installation

#### SPECIFICATIONS:

- Height Above Bench: 65mm
- Suits 1/2" tubing
- Chrome plated

043156



### BREHA HAND PUMP

Self priming and simple to install.

#### SPECIFICATIONS:

- Fits a sink with a 32mm mounting hole

BLACK

005542

WHITE

005543

TOP PLUNGER SEAL

005554

BOTTOM PLUNGER SEAL (BS101) BLACK

005555

WASHER KIT (BS100 AND BS101)

035599



### BREHA HAND PUMP SHORT

Self priming and simple to install.

#### SPECIFICATIONS:

Fits a sink with a 32mm mounting hole.

WHITE

005546



### HAND PUMP FYNspray

Black moulded nylon body with chrome plated brass handle and swiveling spout. Suitable for fresh or salt water.

#### SPECIFICATIONS:

- Output: 1L/per 15 strokes

HAND PUMP WS63

005549

SERVICE KIT

005568



### LOW BOY 3 WAY PUMP FAUCET

Combination hand pump, mains pressure and 12V electric pump.

#### FEATURES:

- Low silhouette suitable for fold down campers
- Mains pressure and 12V electric pump

FAUCET

005578

REPAIR KIT

005579



## CAMEC 12MM OD LLDPE TUBING

### FEATURES:

- LLDPE tubing made from FDA approved materials
- Perfect for caravan plumbing with 12mm push-fit type connections
- Available in 100m and 10m rolls

### SPECIFICATIONS:

- Max Working Pressure: 10 Bar / 145psi @ 20°C. 6 Bar / 90 PSI @ 65°C

|                 |        |
|-----------------|--------|
| 100M ROLL BLUE  | 043458 |
| 100M ROLL RED   | 043459 |
| 100M ROLL BLACK | 043460 |
| 10M ROLL BLUE   | 043461 |
| 10M ROLL RED    | 043462 |
| 10M ROLL BLACK  | 043463 |



## JOHN GUEST TUBE 12MM LLDPE

Linear Low Density Polyethylene for cold and intermittent hot water applications, water purification, water conditioners, ice makers and misting systems.

### FEATURES:

- Wide range of temperature and pressure suitability, broad chemical compatibility and made from non-contaminating materials
- Excellent resistance to environmental stress cracking as measured by ASTM D-1693 (10% IGEPA)

### SPECIFICATIONS:

- Sold as 100m roll
  - FDA compliant materials
- |                 |        |
|-----------------|--------|
| 100M ROLL BLACK | 005252 |
| 100M ROLL RED   | 005254 |
| 100M ROLL BLUE  | 005256 |



## TUBE CUTTER - PLASTIC TUBING

Plastic tube cutter for plastic tubing.

|                  |        |
|------------------|--------|
| TUBE CUTTER (JG) | 042584 |
| TUBE CUTTER (DM) | 000694 |



## SWIVEL ELBOW BRASS END (JG)

038790



## WATER 1/2" BARB - HOSE (JG)

038657



## ELBOW 12MM

|            |        |
|------------|--------|
| ELBOW (JG) | 005430 |
| ELBOW (DM) | 005451 |



## EQUAL DIVIDER 12MM (JG)

038944



## ELBOW MALE BSP 12MM

|                 |        |
|-----------------|--------|
| 3/8" MBSP (JG)  | 005434 |
| 1/2" MBSP (JG)  | 005441 |
| 1/2" M/BSP (DM) | 005461 |



## ELBOW 12MM

|                             |        |
|-----------------------------|--------|
| ELBOW 12MM X 12MM STEM (JG) | 005440 |
| ELBOW 12MM X 12MM STEM (DM) | 005460 |





## REDUCER 15MM

REDUCER 15MM X 12MM (JG)  
REDUCER 15MM X 12MM (DM)

005438  
005458



## REDUCING CONNECTOR 12 - 10MM

Plastic reducer adaptor from 12mm to 10mm.  
REDUCER 12-10MM (JG)  
REDUCER 12-10MM (DM)

005447  
005469



## TEE CONNECTOR 12MM

TEE CONNECTOR (JG)  
TEE CONNECTOR (DM)

005429  
005450



## ADAPTOR FEMALE BSP

12MM X 3/8" F/BSP (JG)  
12MM X 1/2" F/BSP (JG)  
12MM X 3/8" F/BSP (DM)  
12MM X 1/2" F/BSP (DM)

005433  
005436  
005454  
005457



## STRAIGHT CONNECTOR

12MM X 12MM (JG)  
12MM X 12MM (DM)

005431  
005452



## CONNECTOR

15MM X 1/2" BARB (JG)  
15MM X 1/2" BARB (DM)

005432  
005453



## ADAPTOR 12MM

12MM X 3/8" M/BSP (JG)  
12MM X 1/2" M/BSP (JG)  
12MM X 1/2" M/BSP AND O RING (JG)  
12MM X 1/2" M/BSP (DM)  
12MM X 1/2" MBSPT (DM)

005437  
005435  
042581  
005464  
005456



## TUBE SUPPORT INSERT - 12MM

12MM (JG)  
12MM (DM)

005443  
005466



## IN-LINE CHECK VALVE 12MM

Push-on fitting to allow flow in one direction only.  
FEATURES:  
• Prevents water returning down a pipe

12MM (JG)  
12MM (DM)

042582  
005465



## ADAPTOR 12MM

12MM BULKHEAD (JG)

042059

**LOCKING CLIP 12MM**

Optional locking clip to fit 12mm push-on fittings.

**FEATURES:**

- Prevents leaks or release when pipe is forced to a side
- Can be removed if the fitting is to be removed
- Essential if pipe does not meet fitting at correct angle

RED (JG) 005444  
RED (DM) 005467

**BRASS ADAPTOR 12MM MALE BSP**

12MM X 1/2" M/BSP (JG)  
12MM X 1/2" M/BSP (DM)

005442  
005462

**SHUT OFF VALVE IN-LINE STRAIGHT**

Plastic straight shut off inline valve

12MM (JG)  
12MM (DM)

042583  
005470

**ADAPTOR STEM**

Plastic stem adaptor to suit 12mm connectors.

1/2" M/BSP X 12MM (JG) 005439  
1/2" X 12MM M/BSP (DM) 005459

**COLLET COVER 12MM - BLACK (JG)**

005445

**TEMPERING VALVE (JG)**

Designed to accurately regulate the temperature of water for activities such as showering, bathing and hand washing and reduces the risk of scalding. Ideal for caravan and RV plumbing.

**FEATURES:**

- Lightweight and easy to install
- Easy to clean mesh filter seals
- Preset to 50°C
- AS/NZ 4020 (water contract approval)

042586

**HOSE CLAMP WORMDRIVE  
ALL ZINC FINISH**

These general purpose hose clamps are ideal for hose sealing and use in many different applications with a high mechanical load.

**FEATURES:**

- Improved asymmetric housing
- Screw support: Ease of assembly due to the safe guidance of the emerging band end
- Material and clamping range stamped on the band
- Asymmetric extension - prevents the housing from tilting over when the clamp is tightened

**SPECIFICATIONS:**

- Screw and housing: Mild steel zinc plated and clear chromate

10-16MM 005330  
12-22MM 005331  
20-32MM 005332  
25-40MM 005333

**PIPE RETAINING CLIP 12MM WIDE**

15MM  
35MM

042638  
042640

**DIRECTOR PLASTIC**

10MM BARB X 1/2" MBSP  
13MM BARB X 1/4" MBSP  
13MM BARB X 1/2" MBSP  
13MM BARB X 3/4" MBSP  
25MM BARB X 3/4" MBSP  
25MM BARB X 1" MBSP

005354  
005355  
042641  
042651  
042647  
042650



## ELBOW THREADED PLASTIC

13MM BARB X 1/2" INLET MBSP  
25MM BARB X 3/4" MBSP

042654  
005368



## JOINER BARBED TAILS

10MM  
13MM  
19MM  
25MM

005371  
042693  
042661  
042645



## ELBOW BARBED PLASTIC

13MM  
19MM  
25MM

042695  
042660  
042644





**JOINER 13MM HOSE x 3/4" FEMALE NPT**

005412



**JOINER 13MM HOSE x 3/4" MALE NPT**

Joiner 13mm hose x 3/4" M/NPT.

**FEATURES:**

- Unbreakable and reusable nylon
- RV hose repair made easy

005411



**REDUCER PLASTIC BARBED**

10MM X 13MM  
25MM X 32MM  
25MM X 19MM

005378

005382

042657



**TEE TREADED**

10MM BARBED  
13MM BARBED  
25MM BARBED

005383

042694

042649



**TEE 1/2"**

1/2" FBSP

038804



**NUT AND TAIL PLASTIC**

3/4" BSP X 13MM BARB  
1" BSP X 13MM BARB  
1" BSP X 25MM BARB

042658

042659

042646



**SHURFLO IN-LINE CHECK VALVE 1/2INB**

Allows flow in one direction only to safeguard against back surge up to 100psi.

**SPECIFICATIONS:**

- 1/2" barb on both ends

005789



**ONE WAY VALVE**

A very useful accessory which can be fitted into the pump suction line to help ensure maintenance of electric pumps.

005798



**VALVE PLASTIC SHUT OFF**

Screw down action - barbed both ends.  
13MM  
25MM

042643

042655



**TEE 1/2"**

13mm barb x 13mm barb x 1/2" inlet.

042653



**FILTER IN-LINE PLASTIC 13MM**

To suit 13mm hose or screw on fittings.

13MM SHORT  
13MM LONG

042648

042696





**BRASS EZ HOSE CONNECTOR**

042692



**BRASS UNIVERSAL HOSE ADAPTOR**

042691



**HOSE COUPLER 12MM 2 WAY**

042604



**CONNECTOR AND HOSE 12MM SNAP-IN PLASTIC 12MM HOSE FEMALE**

005415



**TAP ADAPTOR UNIVERSAL 3/4" BSP**

042603



**CAMLOCK WITH 25MM BARB TYPE C**

Female camlock with 25mm barb used to connect two hoses with 25mm inner diameter when used in conjunction with equivalent female camlock. Often used to join 25mm waste hose.

**FEATURES:**

- Supplied with R clips x 2 to lock in camlock
- Often used to join 25mm waste hose
- Polypropylene

**FEMALE BARB**  
**MALE BARB**

034817  
034818



**HOSE CONNECTOR 12MM x 1/2" HOSE**

042601



**HOSE CONNECTOR STOP 12MM x 1/2" HOSE**

042602



**GARDENA 1/16" MALE USA ADAPTOR**

Snap on hose fitting to suit the SHURflo In-line Water Entry.

005398



**BRASS HOSE ADAPTOR CLICK ON 1/16" USA THREAD**

**FEATURES:**

- Click-on 1/16" American thread

005399



**BRASS USA-BSP CONVERTER**

Brass conversion for USA threaded water inlet to BSP. The commercial plastic elbow brings the hose neatly down next to the vehicle.

**FEATURES:**

- Includes plastic elbow

034571



### CAMEC MAGNESIUM ANODE ROD FOR SUBURBAN RV HOT WATER SYSTEM

Slightly acidic water is fine to drink and wash with, but it can degenerate your water heater over time. Some water heaters have an in-built anode rod of soft metal that's job is to break down instead of the other components of the water heater. Anodes should be replaced when they have degraded more than 75%, usually yearly, but this is dependent on the quality of water used.

#### FEATURES:

- Magnesium AZ31
- To suit Suburban hot water systems

#### SPECIFICATIONS:

- Size: 21mm x 235mm
- Thread: 3/4" NPT

043519



### WHALE 12V ELECTRIC WATER HEATER - 11 LITRE

An electric only 12V water heater - ideal for caravans and camper trailers. Connects to 12V power supply, no need for a generator, inverter or mains power. It can fit in compact spaces with no gas venting required. The water heater has a rapid heat up time of less than an hour and is highly efficient with heat retention of up to 10 hours. Integrated temperature and pressure valve plus a thermal cut-out and heat indication output, integrated anode for longer life and the relay allows for switching at the helm for ease of use and control.

#### FEATURES:

- Rapid heat up - hot water in less than an hour
- Ideal for use with deck showers
- Low current switching
- Integrated temperature and pressure valve
- Thermal cut-out
- Heating indication output
- Ignition protected

#### SPECIFICATIONS:

- Fuse Size (recommended): 35 Amps
- Current Draw: 30 Amps
- 12V DC, 300W
- Max Water Temperature: 60° Celsius
- Max Pressure: 300psi
- Weight: 6.8kg

043368



### ECO INSTANT HOT WATER SERVICE 220-240V

An economical and compact solution that delivers instant hot water.

#### FEATURES:

- Instant hot and cold running water
- Pressure control
- Consistent hot water temperature output
- Generate hot water in 5-10 seconds
- Low cost and easy installation

#### SPECIFICATIONS:

- Dimensions (compact): 230mm(h) x 190mm(w) x 75mm(d)
- Voltage: 220-240V
- Pressure Rating: 6 Bar
- Current Rating: 3.4 Kw 13.9A
- Power: 3400w

039000

### ATWOOD HOT WATER SYSTEM SPARE PARTS

|                           |        |
|---------------------------|--------|
| CIRCUIT BOARD             | 003576 |
| SPARK PROBE ASSEMBLY      | 003577 |
| IGNITION SWITCH           | 003579 |
| THERMAL CUT OFF           | 003580 |
| GAS SOLENOID VALVE        | 003581 |
| PRESSURE RELIEF VALVE     | 003582 |
| THERMOSTAT AND ECO SWITCH | 003583 |



### MAGNESIUM ANODE ROD

To suit Suburban hot water system. 300mm x 21mm. Thread 3/4" NPT.

RETAIL PACKAGING

035975  
043242

### ADJUSTABLE PRESSURE REDUCING VALVE

Recommended to be used with Henry hot water service (refer code 038545).

#### SPECIFICATIONS:

- 1/2" Female BSP
- 110-550KPA

039245



### WATER HEAT TEMPER VALVE 1/2" MALE BSP BLUE CAP INSULATED

This valve is suitable for domestic and commercial installation on water heater systems.

#### FEATURES:

- Recommended for all hot water services on the outlet side
- Blue cap

#### SPECIFICATIONS:

- Dimensions: 150mm(l) x 150mm(h) x 70mm(d)

039244



### 1 1/16" SOCKET TO REPLACE SUBURBAN ANODES

043383



## CLEANOXIDE DRINKING WATER TREATMENT TABLETS

### FEATURES:

- Controls bacteria, fungi, viruses, biofilm and algae
- Neutralises unpleasant taste and odours from the tank
- Effective over a wide pH range (4 to 10)
- Biodegrades in sunlight, so no harmful effects on the environment if flushing your tank
- Active ingredient was approved in Australia for the treatment of drinking water in 2005
- Each tablet treats 100 to 400 litres of water
- Zip-lock pouch with full instructions on the back

043283



### B.E.S.T. INLINE WATER FILTER 1 MICRON

The hose range is a DIY installation - it connects to your drinking water/filling hose in less than a minute.

This inline is dual purpose - it can be used on your hose to fill your tanks and also when you are connected directly to mains water.

### FEATURES:

- Reversible - if the flow reduces, simply reverse the unit, hook it back up and flush the dirt away
- Compact - stores away with your hose
- Sealed - no cartridges

WITH FITTINGS

038332

1/2" FBSP NO FITTINGS

043282



### SHURFLO FILTRATION KIT FOR RV AND MARINE

Designed for both RV and marine applications.

### FEATURES:

- Supplied complete with all parts and fittings including carbon block disposable filter
- Reduces unpleasant tastes and odours
- Provides fresh, clean drinking water

KIT

036794

REPLACEMENT FILTER CARTRIDGE

036795



### AQUATAB WATER TABLETS

Effervescent water purification tablets. When dissolved in one litre of water, renders water suitable for drinking after just thirty minutes.

### FEATURES:

- Fast acting and fast dissolving

### SPECIFICATIONS:

- Pack of 50
- 1 tablet/1 litre water

000263



### WHALE AQUA SOURCE WATER FILTER

An inline water filter to be fitted in the cold water pipe.

### FEATURES:

- Very efficient
- When fitted, filter will remove foreign bodies and dirt particles
- Disposable

026528



### B.E.S.T. INLINE MOUNTING CLIPS

Mounting clips for B.E.S.T. Inline Water Filter (refer code 038332).

### SPECIFICATIONS:

- Pack of 2

038333



### CAMEC STAINLESS STEEL SINK 890MM X 480MM

Includes waste, plug and mounting clips.

#### SPECIFICATIONS:

- Dimensions: 890mm(w) x 480mm(d) x 170mm(h)
- Dimensions of main sink: 315mm(w) x 380mm(d)
- Dimensions of secondary sink: 155mm(w) x 300mm(d)
- 90mm waste outlets

042973



### CAMEC STAINLESS STEEL SINK 780MM X 480MM

Includes waste, plug and mounting clips.

#### SPECIFICATIONS:

- Dimensions: 780mm(w) x 480mm(d) x 170mm(h)
- Dimensions of main sink: 330mm(w) x 380mm(d)
- 90mm waste outlet

042976



### CAMEC STAINLESS STEEL SINK WITH DRAINER

Top quality stainless steel basin and drainer.

#### FEATURES:

- Foam tape and 10 brackets included
- Does not include plug or waste

#### SPECIFICATIONS:

- Dimensions: 760mm(w) x 155mm(h) x 360mm(d)
- 45mm waste outlet

038169



### CAMEC STAINLESS STEEL SINK WITH DRAINER

Top quality stainless steel basin and drainer.

#### FEATURES:

- Foam tape and 8 brackets included
- Does not include plug or waste

#### SPECIFICATIONS:

- Dimensions: 780mm(w) x 170mm(h) x 480mm(d)
- 45mm waste outlet

006046



### CAMEC STAINLESS STEEL ROUND BASIN 450MM

Includes waste, plug and mounting clips.

#### SPECIFICATIONS:

- Dimensions: 450mm(diam.) x 180mm(d)

042974



### STAINLESS STEEL BASIN

Top quality stainless steel basin available in a number of sizes.

#### FEATURES:

- The full extent of stainless steel is an extra 15mm on all sides
- Does not include plug and waste (25mm) - refer to code 006064, plug, code 006072, straight waste or code 006073 for 90° angle waste

282 X 225MM

006051

306MM X 306MM X 120MM

006053

350MM X 30MM X 150MM

006054

ROUND BASIN 280MM DIAM X 112MM(D)

006050



### SMEV SINK STAINLESS STEEL AND DRAINER

Compact stainless steel top fixing sink and drainer.

#### FEATURES:

- Includes plug and straight waste
- Includes perimeter seal and fitting clips

590MM X 370MM

006032

650MM X 380MM

006033



### CAMEC STAINLESS STEEL ROUND BASIN AND DRAINER

Includes waste, plug and mounting clips.

#### SPECIFICATIONS:

- Dimensions: 850mm(w) x 450mm(d) x 170mm
- Dimensions of sink: 357mm (diam.)
- 90mm waste outlet

042975



### CAMEC STAINLESS STEEL BASIN

Top quality stainless steel basins available in a number of sizes.

#### FEATURES:

- Can be top or under mounted

315MM X 265MM

038170

327MM X 278MM

038171

352MM X 282MM FULL FLANGE

038172



**SMEV BASIN STAINLESS STEEL**

Attractive compact stainless steel top fixing sink.

**FEATURES:**

- Includes plug and straight waste

**380MM X 280MM**

**370MM X 370MM**

**380MM X 380MM**

**006059**

**006057**

**006058**

**SMEV BASIN/LID/MIXER TAP****FEATURES:**

- Stainless steel bowl
- Glass lid
- Hot and cold tap (refer code 005983)

**SPECIFICATIONS:**

- Dimensions: 420mm(l) x 145mm(h) x 440mm(d)
- Tap fittings are 3/8" Male BSP

**006063**

**BASIN STAINLESS STEEL**

Attractive compact stainless steel sink.

**SPECIFICATIONS:**

- Dimensions: 335mm x 254mm (14" x 10")

**006052**

**ACRYLIC CORNER BASIN**

Acrylic corner basin/sink.

**SPECIFICATIONS:**

- Dimensions: 279mm(l) x 120mm(h) x 279mm(d)
- Inside Sink Dimensions: 280mm(l) x 210mm(w)
- Plug not included
- Waste Hole: 42mm (diam)
- Use with pop up waste 043373
- White

**043617**

**ACRYLIC NARROW RECTANGLE BASIN**

Acrylic, light and sturdy rectangular basin/sink.

**FEATURES:**

- Sits into a cutout in a bench top or can be attached to wall
- Includes soap drainer
- Space for single tap on either side

**SPECIFICATIONS:**

- Dimensions: 508mm(w) x 130mm(h) x 178mm(d)
- Plug not included
- Waste Hole: 42mm (diam)
- Use with pop up waste 043373
- White

**043618**

**ACRYLIC RECTANGLE BASIN/SINK**

Note: The top surface that normally sits above the bench top on these basins is not as smooth as the inner surface of sink/basin - it is not a fault but a function of the manufacturing process.

**SPECIFICATIONS:**

- White
- Use with pop up waste 043373
- Plug not included
- Dimensions: 330mm(l) x 120mm(h) x 285mm(d)
- Inside Sink Dimensions: 300mm(l) x 120mm(h) x 250mm(d)

**043616**

**PLASTIC SINK AND DRAINER**

Acrylic sink and drainer. Does not include taps or waste.

**SPECIFICATIONS:**

- Dimensions: 706mm(l) x 318mm(w) x 115mm(d)
- Inside Sink Dimensions: 350mm(l) x 285mm(w) x 115mm(d)
- Acrylic is 4.5mm thick giving a stable sink and drainer when fully recessed and mounted just with the edging
- White

**006042**

**PLASTIC OVAL BASIN**

- Dimensions: 380mm(w) x 305mm(d) x 150mm(h)
- Use with pop up waste 043373
- White

**043926**

**MINI CORNER BASIN WITH FULL SKIRT****FEATURES:**

- Useful in shower/toilet combination rooms for space-saving corner design. Neatly hides plumbing behind the skirt
- Does not include mounting screws or a waste outlet

**BASIN**

**043017**

**WASTE KIT FOR 45MM SINK HOLE 90°**

**042871**



### POP UP WASTE KIT

- Lightweight construction making it perfect for plastic / fibreglass and ceramic sinks
- Stylish with only the chrome top visible
- Easy operation
- Suits basin holes from 40 – 45mm
- Simple installation with a screw collet under the sink
- Long stem can be cut to required length

043373



### PLUG AND WASTE KIT - 90°

To suit SMEV sinks/basins. Includes 25mm P-Trap.

006068



### PLUG ONLY FOR SINK/BASIN

To suit SMEV sinks/basins only.

#### SPECIFICATIONS:

- Dimensions: top taper 36.75mm  
bottom taper 35.26mm

006067



### WASTE KIT FOR 45MM SINK HOLE

90° outlet with plug.

#### REPLACEMENT PLUG

042871  
043184

### RUBBER SINK PLUGS

To suit sinks/basins.

25MM RED

32MM RED

25MM (1 1/8") GREY

006064

035578

006075



### SMEV PLUG AND WASTE KIT - STRAIGHT 25MM

To suit SMEV sinks/basins.

006065



### PLASTIC WASTE 25MM OUTLET STANDARD

Straight waste suitable for 25mm hose.

#### FEATURES:

- Plug sold separately
- Straight waste

006072



**PLASTC 90° WASTE OUTLET 25MM**

006073



**SINK RUBBER SEAL 520**

Rubber edge seal 520 suits SMEV sink/basins.

**SPECIFICATIONS:**

- Sold in 2 x 1m lengths

006035



**SINK RUBBER SEAL 521**

Rubber edge seal 521 suits SMEV sink/basins.

**SPECIFICATIONS:**

- Sold in 2 x 1m lengths

006036





### CAMEC BASIN 110MM FIXED SPOUT

Basin mixer with 110mm fixed spout with a 40mm cartridge.

#### FEATURES:

- WELS rated complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads
- 40mm cartridge

041716



### CAMEC 3 WAY SINK MIXER 35MM CARTRIDGE WELS RATED

3 way sink mixer incorporates two taps in one - a sink mixer and a filtration faucet. This dual stream has two outlets in the spout and eliminates the need to mount a second faucet for filtered water. Please Note: The tap does not filter water; a separate filtration kit is required.

#### FEATURES:

- WELS rated, complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads

041677

35MM REPLACEMENT CARTRIDGE

042791



### CAMEC HIGH BASIN MIXER

#### FEATURES:

- WELS rated, complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads
- 35mm cartridge

041676



### CAMEC BASIN MIXER 150MM SPOUT

Basin mixer with 150mm spout with a 40mm cartridge.

#### FEATURES:

- WELS rated complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads
- 40mm cartridge

041674



### CAMEC SINK MIXER 220MM SPOUT

Sink mixer with 220mm spout with a 40mm cartridge.

#### FEATURES:

- WELS rated complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads
- 40mm cartridge

041675





## SINGLE COLD TAP

Low profile fixed pillar tap.

### FEATURES:

- Chrome on metal finish

005995



## SINGLE DECK WASHDOWN TAP

Single tap with threaded outlet, suit washing machine or where a hose is to be connected.

### FEATURES:

- Chrome on metal finish

005996



## HOT AND COLD BASIN MIXER

This faucet features hot and cold mixer taps, complete with high rise 200mm swivel spout to allow easy filling of jugs and kettles.

### FEATURES:

- Chrome on metal finish.
- Model: MG3100

005993



## SINGLE FOLDING FAUCET

Single folding faucet - when folded body is 39mm high.

### FEATURES:

- Chrome finish

005990



## BULKHEAD SINGLE MIXER

- Chrome

006005



## SINGLE FAUCET - LEFT HAND LESS UNION

Requires barb to take 12mm hose.

005904



## HOT AND COLD BASIN MIXING FAUCET

Hot and cold mixer set with 90mm centre basin mixing faucet. Requires barb to take 12mm hose.

- Chrome

005910



## WHALE TUCKAWAY FAUCET ON/OFF SWITCH

This faucet fits onto the vertical side of the sink bowl and folds down neatly for storage within the sink. Simply drill a hole into the side of the sink and pass through the thread with rubber seal from the front.

- Rear screws on, providing a two stage hose barb to suit 3/8" or 1/2" hose

STANDARD  
WITH ON/OFF SWITCH

005939  
005938



### ELECTRIC 12V ROTATING FAUCET

Plastic rotating faucet with built in 12V switch designed for use with a water pump or pressure reducing city water entry.

#### FEATURES:

- Folds down and is ideal for slide out camper trailer kitchens
- White

005958



### BARWIG SINGLE FAUCET AND SWITCH

#### SPECIFICATIONS:

- Maximum Inlet Pressure: 35psi

052 FAUCET AND SWITCH

0552 FAUCET NO SWITCH

005953

005954



### WHALE TELESCOPIC FAUCET

Mainly used with foot pumps, the telescopic outlet swivels through 360 degrees and can be pushed down when not in use.

#### FEATURES:

- Great space saver

005937



### RECESS EXTERNAL WALL SHOWER

Suitable for external recessed wall types, annexes, shower tents, etc. with keyed lock security.

#### FEATURES:

- Fade and impact resistant, UV stabilised and can be painted
- Unit screws into the cut-out from the outside face - screws are covered when door is closed
- Hot and cold pipes connect at the rear to 1/2" BSP male water pipe fitting. Same goes for the shower rose connections
- On/off switch on shower rose
- Shower rose can be either hand held or bracketed to door

#### SPECIFICATIONS:

- Cut-Out Size: 155mm x 280mm (w)
- Can be installed either horizontally or vertically
- Extends outside just 12-15mm
- 120mm from mounting inside to end of threads

SHOWER KIT WHITE

005810

SHOWER KIT BLACK

042898

HAND HELD SHOWER ROSE AND

BRACKET WHITE

005833

REPLACEMENT HOSE WHITE

005832



### LOCKABLE BUDGET EXTERNAL SHOWER BOXES

#### FEATURES:

- Neat appearance in black or white to match your RV design
- Lock for security
- UV stabilised plastics designed for outdoor installation
- Requires cavity behind the box for hose to push back into
- On/off button on the hand sprayer
- Hook on the inside of the door to hang the hand sprayer
- Connections and taps for hot and cold water hook up

WHITE

043191

BLACK

043192



### SHOWER BOX WITH HOT COLD MIXER PULL OUT PUSH BUTTON

A compact shower with a long hose.

#### SPECIFICATIONS:

- Dimensions: 180mm(l) x 130mm(h) x 325mm(d)
- 4m hose
- White

005822



### HOT AND COLD SHOWER MIXER

PVC shower mixer, comes with white taps and a straight out mixer outlet to suit a flexible shower hose.

- White

005824



### HOT AND COLD SHOWER MIXER ONLY - CHROME WITH CRYSTAL HANDLES

To suit hand held showers.

- Chrome

005861

**SHOWER SET - WHITE**

Includes shower head, adjustable pole, soap holder and mixer taps.

043604

**TRIGGER SHOWER SET**

This trigger shower set has a heavy duty chrome finish. On/off trigger incorporated in handle. Wall bracket to suit (refer code 005872).

- White

005857

**TRIGGER SHOWER SET**

On/off trigger incorporated in handle. Chrome hose 1.5m.

- White/chrome

043267

**SHOWER WITH ADJUSTABLE FLOW RATE/ HOSE ELBOW**

This elbow shower set comes complete with adjustable flow rate nozzle. Heavy duty construction.

**FEATURES:**

- Heavy duty chrome finish
- Includes adjustable flow rate nozzle
- Wall bracket to suit - refer code 005872

**SPECIFICATIONS:**

- Hose: 1.5m length
- Chrome

005869

**CAMEC SHOWER WALL MIXER**

Shower wall mixer 35mm cartridge.

**FEATURES:**

- WELS rated complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads
- 35mm cartridge

041678

**COBRA SHOWER SET COMPLETE**

Rail mounted shower set with hose. Handset can be raised or lowered to desired position.

**FEATURES:**

- Includes shower head hose rail and bracket
- Sliding rail with bracket (refer code 005873)
- Chrome

005859

**SHOWER HOSE 1.5M**

Hose to suit elbow shower set (refer code 005869).

005870

**SHOWER MIXER ONLY SOLID HANDLE**

- Chrome

005862

**SHOWER SET WITH SLIDING BAR**

Includes double lock flexible hose and soap holder.

**SPECIFICATIONS:**

- Sliding Bar - 1.5m length
- Brass double lock
- Flexible hose

005882



### MAINS PRESS KIT - FAUCET

Adapts to mains pressure taps.

#### FEATURES:

- Includes 1.25m x 12mm pressure hose, clamps, connectors and fittings to connect to 3/4" external thread

005909



### RAIL WITH SLIDING BRACKET FOR ELBOW SHOWER

This rail enables elbow and trigger shower sets to be wall mounted. Note: hand shower set not included (refer codes 005869 and 005857).

005873



### WALL BRACKET

Bracket to suit trigger and elbow shower set.

- Chrome

005872



### SHOWER HEAD WITH ON/OFF BUTTON

- White

038265



### CARTRIDGE KIT FOR PHOENIX EXTERNAL SHOWER

Includes 2 cartridges, springs and washers.

043444



### CARTRIDGE 330/804 MIXER - COURSE

Replacement cartridge valve to suit hot and cold mixer (refer code 005824).

005829



### BRASS UNION 1/2" BSP x 3/8" FEMALE WITH WASHER

Water, brass adaptor, female 3/8" BSP to 12.5mm barb. Clamp your 12mm hose to one end the other end screws onto a male 3/8" BSP thread.

005951



### BRASS MAINS PRESS A-FRAME TAP

005975



### THROUGH BULKHEAD ELBOW CONNECTOR


This fitting is used to connect hand shower sets where installation is required through wall fixing.

#### FEATURES:

- Heavy duty chrome finish
- This elbow fits the CAMEC shower and trigger shower hose
- 3/8" BSP through wall and outlet suits chrome flexible shower hose, which is also 3/8" BSP
- Chrome

005874



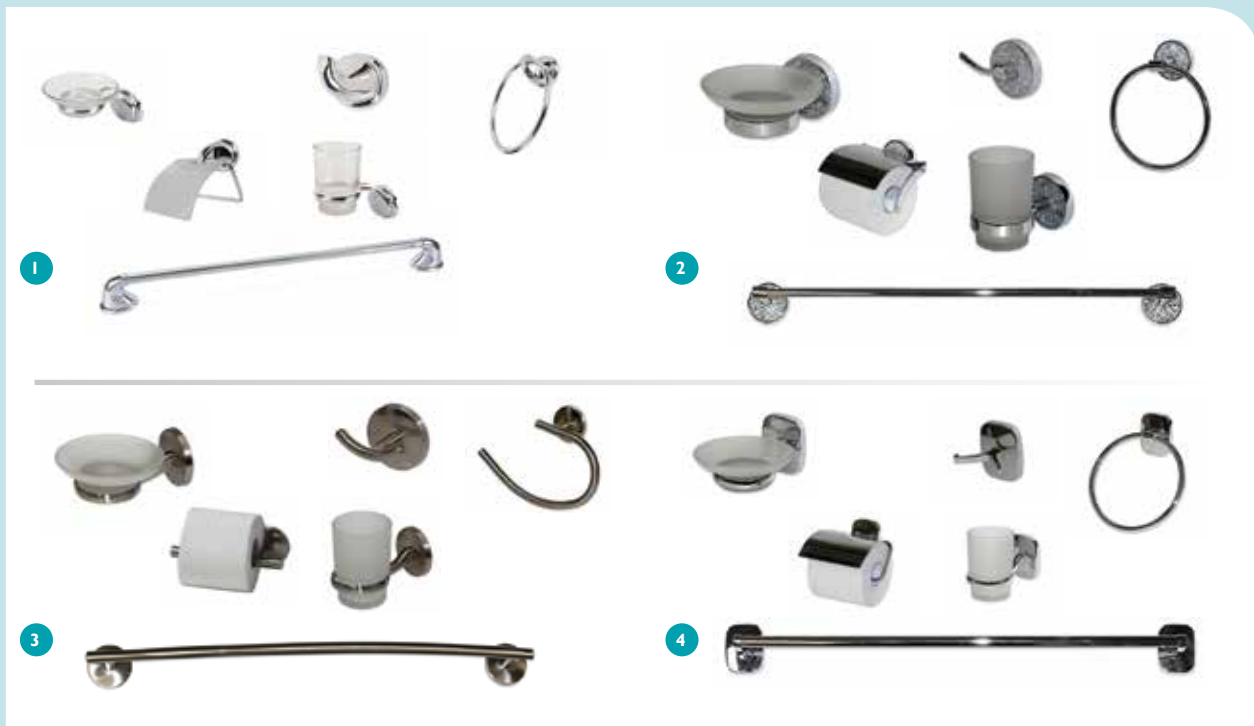

## BATHROOM ACCESSORY SETS

### FEATURES:

Set of 6. Includes: soap dish holder, toilet roll holder, towel rail, towel ring, glass tumbler and holder.

- Chrome

OVAL (1)  
 MOSAIC (2)  
 BRUSHED (3)  
 SQUARE (4)

002109  
 043024  
 043025  
 043026



## SUPER SUCTION

Instantly transform a room with an affordable premium suction product. Ideal for homes, motorhomes, caravans and offices.

### FEATURES:

- Super suction
- One step installation
- Removable
- Press button action
- Chrome painted ABS plastic

### SPECIFICATIONS:

- Weight Load: 3kg

TOILET ROLL HOLDER CHROME  
 STORAGE BASKET CHROME  
 HOOK 3KG WHITE  
 TOWEL RING CHROME  
 SOAP DISH CHROME  
 3 IN ONE BASKET CHROME  
 DISPENSER WHITE

039885  
 039887  
 039888  
 039889  
 039890  
 039891  
 042703



## SHOWER TIMERS

4 MINUTE SUCTION

039894

DIGITAL SUCTION ALARM WITH LED LIGHT

039895



## SOAP DISPENSERS

400ml dispenser available as an individual unit or double bracket. Backing plate is fixed to the wall with screws (provided) or silicone, etc. and dispensers are removable. For hand soap, dish washing liquid, shampoo and body wash. Use in the caravan bathroom or kitchen. If the button is held in, soap will continue to flow until it is released. Colour is white with clear panels so that you can see when to re-fill.

SINGLE  
 DOUBLE

042872  
 042873



#### CLASSIC CABINET

White cabinet section only constructed from ABS plastic. Strong, durable and easy to clean. Compatible width with Thetford 400 series toilet.

##### SPECIFICATIONS:

- Dimensions: 668mm(l) x 555mm(w) x 500mm(d)
- White

002120



#### CLASSIC BASIN FOLD UP

Space saving fold-away, self draining basin constructed from ABS plastic. Strong, durable, easy to clean. Compatible with Thetford cassette toilet.

##### SPECIFICATIONS:

- Dimensions: 810mm(l) x 668mm(h) x 500mm(d)
- To suit 400 Series cassette
- Basin section only

033523



#### ABS ACRYLIC SHOWER TRAY

Acrylic shower tray. Slightly raised section at one end where a portable toilet can sit.

##### FEATURES:

- Prior to fitting, it is essential to pack up the raised section, from underneath, to prevent damage during use
- Drill floor waste at any location
- Plug outlet and waste not included

##### SPECIFICATIONS:

- Dimensions: 965mm(l) x 585mm(w) x 125mm(d)
- Weight: 1.7kg
- White

002165



#### CLEO BASIN TIP UP

An ideal vanity sink unit for caravan, boat and motorhome bathrooms with limited free space. The Cleo tip up sink/folding vanity basin features an integrated soap and toothbrush holder and a simple lift out basin.


040835



#### CLEO BATHROOM CABINET WITH SLIDING MIRROR

Featuring twin mirror sliding doors complete with a travel lock to ensure the cabinet remains secure whilst on the road. The Cleo vanity cabinet comes with retaining bars as well as a handy accessories shelf.

040836



#### VT90 SHOWER TRAY

High gloss, ABS, shower tray.

##### SPECIFICATIONS:

- Dimensions: 830mm(l) x 670mm(h) x 55mm(d)
- White

002166



#### SHOWER TRAY DELUXE

Deluxe shower tray with a non-slip base.

##### SPECIFICATIONS:

- Dimensions: 1010mm(l) x 75mm(h) x 683mm(d)
- Weight: 2.2kg
- Waste: 50mm

035579





## GAS DETECTOR SAFE-T-ALERT 12V

Gas detector Safe-T-Alert 12V suitable for LPG and natural gas.

### FEATURES:

- Draws 46 MA and is simple to operate
- When the test switch is activated a complete diagnostic test is performed
- The detector is fully operational from 6 to 16V DC, providing continuous operation

000342



## CARBON MONOXIDE ALARM

This battery powered CO alarm incorporates sophisticated electronic components to protect you and your family from the dangers of Carbon Monoxide (CO).

### FEATURES:

- Fuel Cell Technology: The electrochemical sensor contains a proton conducting membrane which generates a current in the presence of carbon monoxide (CO). This current is measured, then displayed on the alarm
- The sensor is more accurate, uses less current and is less sensitive to humidity and other gases than competitive models
- Long battery and sensor life

### SPECIFICATIONS:

- Dimensions: 165mm (diam) x 30mm(h)
- 3 AA batteries (included)
- Loud alarm

000344



## GAS DETECTOR 12V G3000

Intended to detect leakage of natural gas.

### FEATURES:

- For installation in caravans and boats
- Includes mounting bracket and screws
- As LPG and natural gas are heavier than air, mount at floor level
- Always ensure vents are not covered

000343



## LPG CONSUMER INSTRUCTION PLATES (CARAVAN)

Metal gas instruction plate with consumer instructions for fixing to caravans and marine craft.

### SPECIFICATIONS:

- Dimensions: 100mm(l) x 100mm(h) x 1mm(d)
- Pack of 2

003869



## METAL GAS INSTRUCTION PLATE (MARINE)

Metal gas instruction plate with consumer instructions for fixing to marine craft.

### SPECIFICATIONS:

- Dimensions: 100mm(l) x 90mm(h) x 2mm(d)

003870



## GAS COMPLIANCE DECAL

Consumer instructions for fixing to caravans/marine craft.

- NO. 3 - NEAR STOVE
- NO. 5 - BOOT LID
- NO. 6 - EVACUATION

003875  
003877  
003878

**This vent must remain unrestricted to provide ventilation when LP Gas appliances are in use**

## GAS VENT VENTILATION DECAL

White with black writing.

043380

**WARNING**  
**Ensure ventilation when the Cooker is in use.**  
**Do not use for space heating.**

## GAS VENTILATION DECAL

White with black writing.

043380

**GAS TEST POINT 3/8in**

This test point is located immediately downstream from the regulator. It allows the user to easily test that gas is coming through the regulator and that it is at reduced pressure.

**FEATURES:**

- May be used with flared nut ID-601 for 3/8" pipe, or ID-600 for 5/16" pipe

**SPECIFICATIONS:**

- Inlet is from regulator - 3/8" male BSP
- Outlet is 3/8" SAE male flare

003910

**GAS PRESSURE TEST POINT**

This test point is located immediately downstream from the regulator. It allows the user to easily test that gas is coming through the regulator and that it is at reduced pressure.

**SPECIFICATIONS:**

- 5/16" SAE Male x 3/8" BSPT Male
- Inlet: 3/8" - screws into regulator
- Outlet: 5/16" SAE Male flare

003909

**GAS CYLINDER VALVE SAFETY PLUG ONLY POL**

Prevents accidental leaks and hazards during transportation of cylinder or when not in use.

036513

**COPPER TUBE**

Annealed copper tube suitable for gas installations.

- Sold as a 30m roll

|       |        |
|-------|--------|
| 1/4"  | 003950 |
| 5/16" | 003952 |
| 3/8"  | 003954 |

**YELLOW 12MM THREAD SEAL GAS TAPE (10m)**

Used on threaded joins on gas pipe.

- Yellow

004063

**SADDLES**

Used to secure copper tube to the chassis.

|                     |        |
|---------------------|--------|
| <b>COPPER</b>       |        |
| 5/16" - 7.95MM TUBE | 003959 |
| 3/8" - 9.52MM TUBE  | 003960 |
| 1/2" - 12.7MM TUBE  | 003961 |
| <b>PLASTIC</b>      |        |
| 13MM                | 042642 |
| 19MM                | 042656 |

**GAS BAYONET DUST CAP**

043382

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.





### BALL VALVES

|                     |        |
|---------------------|--------|
| 1/4"FBSP X 1/4"FBSP | 004043 |
| 5/16"SAE AND NUTS   | 004046 |
| 3/8"BSP AND NUTS    | 004047 |
| 3/8"SAE AND NUTS    | 004048 |



### CHROME FLOOR MOUNT x 1/2" FEMALE BSP

To suit low pressure appliances such as barbeques and flueless space heaters. For floor or wall mount.

#### FEATURES:

- Chrome plated
- Dust cap
- Mounting screws x 2

#### SPECIFICATIONS:

- Connection: 1/2" female
- Maximum Inlet Pressure: 7kPa
- Chrome

004051



### COMPANION FEMALE 3/8" LEFT HAND THREAD X FEMALE POL

004054



### ELBOW 3/8" LEFT HAND THREAD

|                                 |        |
|---------------------------------|--------|
| 3/8" MBSP X POL MALE LH R ANGLE | 004056 |
| 3/8" FLH BSP X FEMALE POL       | 004059 |



### NO 6 FLARE NUT AE

Flare nuts are placed over the copper pipe prior to using the FLARE tool.

|                                  |        |
|----------------------------------|--------|
| 1/4" MALE SAE                    | 003966 |
| 5/16" MALE SAE                   | 003967 |
| 3/8" MALE SAE                    | 003968 |
| 1/2" FEMALE SAE                  | 003970 |
| RED 3/8" FEMALE SAE X 5/16" TUBE | 003973 |
| RED 1/2" FEMALE SAE X 3/8" TUBE  | 003974 |



### NO 7 UNION

This fitting is often added to an appliance.

|                                |        |
|--------------------------------|--------|
| 3/8" MALE SAE X 1/8" MALE BSP  | 003981 |
| 3/8" MALE SAE X 3/8" MALE BSP  | 003983 |
| 3/8" MALE SAE X 1/4" MALE BSP  | 003982 |
| 3/8" MALE SAE X 1/2" MALE BSP  | 003984 |
| 1/4" MALE SAE X 3/8" MALE BSP  | 003976 |
| 1/2" MALE SAE X 1/2" MALE BSP  | 003986 |
| 5/16" MALE SAE X 1/8" MALE BSP | 003977 |
| 5/16" MALE SAE X 3/8" MALE BSP | 003979 |
| 5/16" MALE SAE X 1/2" MALE BSP | 003980 |



### NO 8 ELBOW

|                                |        |
|--------------------------------|--------|
| 3/8" MALE SAE X 1/4" MALE BSP  | 003992 |
| 5/16" MALE SAE X 1/4" MALE BSP | 003989 |
| 5/16" MALE SAE X 3/8" MALE BSP | 003990 |



### NO 16 FEMALE UNION

|                                  |        |
|----------------------------------|--------|
| 3/8" MALE SAE X 3/8" FEMALE BSP  | 004001 |
| 3/8" MALE SAE X 1/4" FEMALE BSP  | 004000 |
| 3/8" MALE SAE X 1/2" FEMALE BSP  | 004002 |
| 1/4" MALE SAE X 1/4" FEMALE BSP  | 003995 |
| 1/2" MALE SAE X 3/8" FEMALE BSP  | 004003 |
| 5/16" MALE SAE X 1/4" FEMALE BSP | 003997 |
| 5/16" MALE SAE X 3/8" FEMALE BSP | 003998 |

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.

**No 17 DOUBLE UNION**

|                                 |        |
|---------------------------------|--------|
| 1/4" MALE SAE X 1/4" MALE SAE   | 004004 |
| 3/8" MALE SAE X 3/8" MALE SAE   | 004006 |
| 5/16" MALE SAE X 5/16" MALE SAE | 004005 |
| 5/16" MALE SAE X 1/4" MALE SAE  | 004007 |
| 3/8" MALE SAE X 5/16" MALE SAE  | 004008 |

**No 18 DOUBLE ELBOW**

|                                 |        |
|---------------------------------|--------|
| 3/8" MALE SAE X 3/8" MALE SAE   | 004011 |
| 5/16" MALE SAE X 5/16" MALE SAE | 004010 |

**No 19 3-WAY**

|                         |        |
|-------------------------|--------|
| NO19 3-WAY TEE 3/8 SAE  | 004014 |
| NO19 3-WAY TEE 5/16 SAE | 004013 |

**No 24 REDUCING BUSH**

|                                 |        |
|---------------------------------|--------|
| 3/8" FEMALE BSP X 1/4" MALE BSP | 036529 |
| 1/2" FEMALE BSP X 1/4" MALE BSP | 036530 |
| 1/2" FEMALE BSP X 3/8" MALE BSP | 036531 |

**No 25 EXTRUDED ELBOW**

|                                 |        |
|---------------------------------|--------|
| 3/8" MALE BSP X 3/8" FEMALE BSP | 036532 |
| 1/4" MALE BSP X 1/4" FEMALE BSP | 004018 |

**No 27 HEXAGON NIPPLE 1/4" x 1/4"**

|                               |        |
|-------------------------------|--------|
| 1/4" MALE SAE X 1/4" MALE BSP | 004020 |
|-------------------------------|--------|

**No 34 ELBOW 3/8" x 3/8IN**

|                                   |        |
|-----------------------------------|--------|
| 3/8" Female BSP x 3/8" Female BSP | 036538 |
|-----------------------------------|--------|

**No 35 3-WAY TEE 3/8" BSP**

|                        |        |
|------------------------|--------|
| NO35 3-WAY TEE 3/8 BSP | 036539 |
|------------------------|--------|

**No 36 FEMALE UNION ELBOW**

|                                  |        |
|----------------------------------|--------|
| 3/8" MALE SAE X 3/8" FEMALE BSP  | 004028 |
| 5/16" MALE SAE X 1/4" FEMALE BSP | 036541 |

**No 38 SINGLE UNION BODY**

|                                 |        |
|---------------------------------|--------|
| 5/16" MALE BSP X 1/8" MALE BSP  | 036542 |
| N5/16" MALE SAE X 3/8" MALE SAE | 036544 |
| 5/16" MALE SAE X 1/4" MALE SAE  | 036543 |
| 5/16 X 3/8 M/F                  | 036546 |
| 1/4 BSPP M X 1/4 BSP F          | 036545 |

**No 39 DOUBLE UNION BODY**

|                |        |
|----------------|--------|
| 5/16" X 5/16IN | 036547 |
|----------------|--------|

**No 56 FLARE CAP NUT**

|                        |        |
|------------------------|--------|
| 5/16" FEMALE FLARE SAE | 004029 |
| 3/8" FEMALE SAE        | 004030 |

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.



**No 62 - 1/4" MALE BSP x 1/4" FEMALE UNION**

Used to convert copper pigtailed with dual/changeover regulators. For use with single OPP regulators less POL.

**SPECIFICATIONS:**

- Female Union 1/4" Male BSPT Inverted Flare 1/4"

004033



**No 65 FLARE PLUG**

5/16" FEMALE FLARE SAE  
3/8" MALE SAE

004035  
004036



**No 70 FLARE SWIVEL**

3/8" FEMALE SAE X 3/8" FEMALE SAE 004038  
5/16" FEMALE SAE X 5/16" FEMALE SAE 004037



**No 72 ADAPTOR**

3/8" FEMALE BSP X 1/4" MALE BSP 036553  
1/4" FEMALE BSP X 1/4" MALE BSP 036552  
1/2" FEMALE BSP X 1/4" MALE BSP 036554  
1/2" FEMALE BSP X 3/8" MALE BSP 036555



**MALE BAYONET FITTING**

Low pressure appliance hose adaptor.

**FEATURES:**

- Dust cap
- Brass

033800



**No 73 REDUCING NIPPLE**

3/8" MALE BSP X 1/4" MALE BSP 004041  
1/4" X 1/8" 036556

**GAS ADAPTOR 1/2" MALE BSP x 5/16" SAE MALE FLARE**

042580



**ADAPTOR MALE POL To 1/4" MALE BSP**

Adaptors to suit POL cylinders.

**SPECIFICATIONS:**

- Male POL to 1/4" Male BSP

035719



**ADAPTOR 3/8" LEFT HAND FEMALE To 1/4" BSP MALE**

Adaptors to suit 3/8" BSP left hand cylinders.

035714



**ADAPTOR STRAIGHT 3/8" LEFT HAND**

Adaptors to suit 3/8" BSP left hand cylinders.

**SPECIFICATIONS:**

- 3/8" left hand Male x 1/4" Female BSP

035715



**ADAPTOR 9KG BOTTOM To 3/8" LEFT HAND COMPANION**

Adaptor that fits into a 4.5 or 9kg gas bottle and allows 3/8 left hand thread to connect.

ADAPTOR 3/8"

035722

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.



## GAS CYLINDERS

### FEATURES:

- AGA approved
- Class 2 gas cylinders are specifically coated making them suitable for recreational vehicles, and general use

|                           |        |
|---------------------------|--------|
| 9KG POL NO GAUGE CAMEC    | 040408 |
| 9KG GALV AND POL NO GAUGE | 003860 |
| 4.5KG C/W POL-TALL        | 003852 |
| IMPORTED 4.5KG 3/8 LH     | 036507 |
| 4.5KG C/W POL-TALL        | 041778 |
| 4KG C/W POL-SQUAT         | 003853 |
| 4KG GALV AND POL NO GAUGE | 003861 |
| 2KG 3/8 L/H THREAD        | 003857 |
| 1.25KG 3/8 L/H THREAD     | 003856 |



## GAS DOOR FOR GALVANISED BOX (003830)

Available with left or right hand hinge in smooth or stucco white. Lockable - includes 2 keys.

|               |        |
|---------------|--------|
| LHH SMW WHITE | 003835 |
| RHH SMW WHITE | 003837 |
| LHH STW WHITE | 003836 |
| RHH STW WHITE | 003838 |
| LHH SMW MILL  | 003831 |



## GAS BOX GALVANISED

To suit 9kg gas cylinder. Mostly used in small motorhome conversions.

### FEATURES:

- Prefabricated sealed compartment
- Lockable door available (not included)
- Gas cylinder not included

### SPECIFICATIONS:

- Dimensions: 360mm(w) x 505mm(h) x 360mm(d)

003830



## GAS CYLINDER CRADLE UNIVERSAL

Universal, extra strong base.

|                               |        |
|-------------------------------|--------|
| 4KG                           | 003824 |
| 9KG PLATED                    | 003827 |
| 9KG PLATED - ADJUSTABLE CLAMP | 003829 |



## GAS CYLINDER GAUGE ACCU-LEVEL MAGNETIC STRIP GAUGE

### FEATURES:

- To activate, pour hot water down the heat sensitive strip
- Reusable magnetic strip

003868



## PREMIER GAS FUSE COMES WITH POL

- Suits POL gas cylinders
- Closes gas supply automatically if a major leak occurs

003890

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.





## MANUAL CHANGEOVER GAS VALVE

Easily switch between cylinders.

043464



## MARSHALL SINGLE REGULATOR OPP 190MJ

This two stage regulator combines both a high pressure first stage and a low pressure second stage regulator into a single unit. Ideal for RV applications to ensure a smooth and continuous flow.

### SPECIFICATIONS:

- Inlet Pressure: 100psi
- Outlet Pressure: 9" W.C
- Inlet: 1/4" NPT

190MJ  
290MJ

042050  
042051



## GAS REGULATOR OPP MANUAL DUAL AND BRACKET

Non adjustable regulator for RV installations only.

### FEATURES:

- Dual stage
- Complete with bracket and fixing screws

### SPECIFICATIONS:

- Manual changeover
- Capacity: 160mj/hr - 3.2kg/hr
- Inlet: 1/4" NPT
- Outlet: 3/8" NPT

003892



## GAS DOUBLE REGULATOR AUTO AND COPPER PIGTAIL

Adjustable LPG regulator, dual stage for RV installations.

### FEATURES:

- Complete with copper pigtails (450mm) x 2, bracket and fixing screws

### SPECIFICATIONS:

- Automatic changeover
- Capacity: 200mj/hr - 4kg/hr
- Inlet: 7/16" NPT
- Outlet: 3/8" NPT

003895



## SINGLE REGULATOR WITH OVER PRESSURE PROTECTION NO POL 6060521

Non adjustable regulator for RV installations only.

### FEATURES:

- Includes 1/4" inverted flare adaptor, bracket and fixing screws

### SPECIFICATIONS:

- Capacity: 160mj/hr - 3.2kg/hr
- Inlet: 1/4" NPT
- Outlet: 3/8" NPT

036520



## REGULATOR AND HOSE KIT 1.8M

Suitable for BBQs and gas camping fridges.

### SPECIFICATIONS:

- Length: 1.8m x 8mm (diam)
- Capacity: 2kg/hr
- Hose type: PVC 8mm ID
- Inlet: POL
- Outlet: 1/4" BSPF

036519



## GAS REGULATOR SINGLE-STRAIGHT POL

Straight adjustable soft nose regulator. Not for RV use

### SPECIFICATIONS:

- Capacity: 175mj/hr - 3.5kg/hr
- Inlet: POL
- Outlet: 3/8" NPT

003884  
036523

REPLACEMENT SOFT NOSE CONE



## GAS REGULATOR SINGLE RIGHT ANGLE POL

Not for RV use.

### SPECIFICATIONS:

- 2.75kg/hour

003888



## GAS REGULATOR SINGLE LEFT HAND X 3/8"

This regulator will fit onto the top of many 3/8" left hand thread gas bottles. It allows gas bottles to be used for low pressure. Not for RV use.

### SPECIFICATIONS:

- Right angle
- Capacity: 100mj/hr - 2kg/hr
- Inlet: 3/8" LH
- Outlet: 3/8" NPT

003889

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.

**PIGTAIL COPPER POL 460MM 7/16F****SPECIFICATIONS:**

- POL x 5/16" inverted flare suits most applications
- Length Without Handwheel: 450mm
- Lengths With Handwheel: 600mm and 900mm
- Class C
- Maximum Working Pressure: 2600kPa

460MM (7/16" F POL)  
762MM (30")

036517  
003897

**GAS HOSE STAINLESS STEEL DOUBLE REGULATOR EXCESS FLOW****SPECIFICATIONS:**

- 450mm x 5/16" inverted flare with hand wheel
- Class C
- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C

003902

**GAS HOSE STAINLESS STEEL SINGLE REGULATOR FLEXIBLE PIGTAIL EXCESS FLOW**

Replacement for PVC pigtail.

**FEATURES:**

- AGA approved

**SPECIFICATIONS:**

- 1/4" Male BSPT
- Class C
- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C

450MM 1/4" MALE NPT X POL 003906

600MM 1/4" MALE NPT X POL 003800

900MM 1/4" MALE NPT X POL 003908

**GAS HOSE STAINLESS STEEL DOUBLE REGULATOR EXCESS FLOW**

Replacement for PVC pigtail.

**FEATURES:**

- AGA approved
- Flexible pigtail

**SPECIFICATIONS:**

- 450mm or 900mm x 5/16" inverted flare
- Class C
- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C

450MM 5/16" INV FLARE X POL 003899

900MM 5/16" INV FLARE X POL 003900

**GAS STAINLESS STEEL HOSE****SPECIFICATIONS:**

- Class B
- Maximum Working Pressure: 7 kPa
- Working Temperature Range: -20°C to +125°C

1.2M BAYONET X 1/4" INV FLARE 002920

1.5M BAYONET X 1/4" INV FLARE 002914

2.0M BAYONET X 1/4" INV FLARE 002913

**GAS HOSE STAINLESS STEEL SINGLE REGULATOR FLEXIBLE EXCESS FLOW**

- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C

450MM H/WHEEL 1/4" MALE NPT X H/WHEEL POL 003905

600MM H/WHEEL 1/4" MALE NPT X H/WHEEL POL 003618

**GAS HOSE 1200 BRAID X 5/16" MALE****SPECIFICATIONS:**

- Class C
- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C

003932



CODE 036512



CODE 003989



CODE 003930



CODE 003927



CODE 003911

## Gas Hose PVC

### SPECIFICATIONS:

Maximum Working Pressure: 2600kPa

Working Temperature Range: -20°C to +65°C

300MM 1/4" F INV FLARE BSP X 1/4" F INV FLARE BSP  
600MM 1/4" F INV FLARE BSP X 1/4" F INV FLARE BSP  
1800MM 1/4" F INV FLARE BSP X 1/4" F INV FLARE BSP  
2400MM 1/4" F INV FLARE BSP X 1/4" F INV FLARE BSP

600MM 3/8" F FLARE SAE X 3/8" F FLARE SAE  
1200MM 3/8" F FLARE SAE X 3/8" F FLARE SAE  
1800MM 3/8" MALE BSP X 3/8" F FLARE SAE  
900MM 3/8" MALE BSP X 1/4" F BSP INV FLARE  
1200MM 3/8" MALE BSP X 1/4" F BSP INV FLARE  
1500MM 3/8" MALE BSP X 1/4" F BSP INV FLARE

036512  
003944  
036509  
036508

003920  
003924  
003919  
036510  
003935  
003937

300MM 3/8" MALE FLARE SAE X 3/8" MALE BSP  
450MM 3/8" MALE FLARE SAE X 3/8" MALE BSP  
600MM 3/8" MALE FLARE SAE X 3/8" MALE BSP

300MM 5/16" MALE FLARE SAE X 3/8" MALE BSP  
450MM 5/16" MALE FLARE SAE X 3/8" MALE BSP  
600MM 5/16" MALE FLARE SAE X 3/8" MALE BSP

600MM 5/16" F FLARE SAE X 5/16" F FLARE SAE  
1200MM 5/16" F FLARE SAE X 5/16" F FLARE SAE

003911  
003912  
003913

003927  
003928  
003929

003930  
003931